

**ATTACHMENT 26 – LETTER FROM MODERN CONTINENTAL COMPANY
TO BECHTEL / PARSONS BRINCKERHOFF DATED JANUARY 13, 1999
REQUESTING CONSIDERATION OF A CELLINE METAL PANEL
STRUCTURAL CEILING SYSTEM**

(7 pages)




MODERN CONTINENTAL CONSTRUCTION CO., INC.

600 Memorial Drive • Cambridge, MA 02139 • Phone (617)864-6300 • Fax (617)864-8766

January 13, 1999

Letter No. C09B2-013
MCC No. 9809-020-W

Central Artery/Tunnel Project
Bechtel/Parsons Brinckerhoff
185 Kneeland St.
Boston, MA 02111

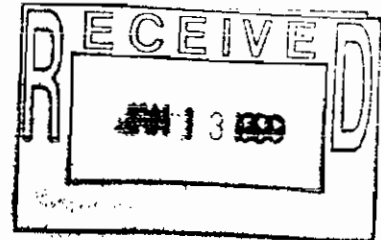

Attention: Mr. R. E. Steffy
Authorized Representative

Subject: Central Artery (I-93) / Tunnel (I-90) Project
Contract No. 99119-C09B2
I-90 Seaport Access Tunnel Finishes
VECP No. 1 - Celline Panel Roof System

Dear Mr. Steffy:

In accordance with Division I Section 8.16, MCC respectfully requests consideration of a Celline Metal Panel Structural Ceiling System manufactured by Environmental Interiors, Inc. as a Value Engineering Cost Proposal in lieu of the precast roof structure, cast-in-place decking, and corrugated decking plenum System as indicated on the above referenced project. This System can be manufactured to suit engineer and owner requirements in either epoxy painted galvanized steel or stainless steel and has been previously used on several Federal projects.

The benefits of this System are multiple. While this System meets or exceeds engineering requirements presented in the contract documents, the System is more uniform and more easily adaptable to differing work areas and potential scheduling issues.

The Celline System has a more uniform appearance to public view because it can be used where precast is called for in the contract and where CIP decking is required. The System will be fabricated and installed to match the panel size modules outlined in the contract to create the desired effect of the module intent. It can be fabricated in stainless steel or epoxy painted galvanized steel with the different components interchangeable to fit budget and aesthetic considerations. For instance, the owner has the option of a painted galvanized ceiling panel with stainless steel hangers or a stainless steel panel with a galvanized backer sheet and stainless steel or galv. hangers. Several of these options are outlined in the VECP Cost Proposal enclosed.

The Celline System can also serve to mitigate potential schedule issues which may be encountered on the project by being more readily available, using non-specialized equipment for installation, and be more easily adaptable to re-sequencing issues, layout problems, and the necessity to facilitate additional installation crews if required.

Sincerely,
The Modern Continental Construction Company, Inc.

cc: Martin Charney, B/PB
Larry O'Brien, MHD
C. Madden, MCC

ROUTING REQUEST					
99119 - C09B2					
A		DISTRIB.	W	WO	
☒		RE	☒		
☒		ARE			
☒		OE	☒		
		AOE			
☒		LFE	☒		
		FE			
		C09B2-Sch	☒		
☒		C09B2 C.C.	☒		
☒		Proj Eng.	☒		
☒		M. Charnock			
☒		R. McAllister	☒		
☒		O. Aharashvili			
FILE:		CN - 9 09B2.01			
FILE:		CN - 9 09B2.24,501			
FILE:		CN - 9 09B2.			

ENVIRONMENTAL INTERIORS INC.

Sent via facsimile 617-695-2272

To be followed by US Mail

December 8, 1998

Mr. John Pastore
Modern Continental Construction Company
6 Necco Court
Boston, MA 02210

RE: Central Artery/Tunnel Project
I-90 Seaport Access
Tunnel Finishes - C09B2
Boston, MA

Dear Mr. Pastore,

We are writing this letter in support of our submission of Environmental Interiors, Inc.'s Celline® metal panel structural ceiling system for use on the referenced project. We hope that you will agree that our Celline® system meets or exceeds all of the project's applicable specified criteria, while delivering significant advantages in terms of cost, schedule and constructability. Please note that our 12/4/98 submission has been made on a preliminary basis and that we would be happy to provide such supporting documentation as the project's designers and owner feel would be appropriate. Further, we would welcome the project team's input into any revisions to our shop drawings or to our product composition that would provide even greater benefit to the project.

- I. Product Delivery
 - a. Celline® is manufactured in our factory in Hudson, New Hampshire - just 35 miles from the project site.
 - b. The entire Celline® system for this project would be shipped on approximately 200 standard flatbed trucks, as opposed to over 1,000 truckloads for the precast system.
 - c. Celline® is palletized for quick and easy unloading and distribution by forklift at the jobsite.
 - d. Due to our proximity to the site and our off-site storage capacity in New Hampshire, deliveries can be scheduled around peak traffic hours and can be postponed or accelerated on short notice in cases of inclement weather, unfavorable traffic conditions, etc. Because our Celline® system is forklift unloaded, there will be no downtime for expensive, unused cranes and operators.

13 River Rd., Hudson, NH 03051
(603) 889-9290
FAX (603) 889-1147

Mr. John Pastore
Modern Continental Construction Company
December 8, 1998
Page 2

II. Installation

- a. Metal ceiling installation has significantly lower incidences of injury and associated workers compensation premiums than do ironwork and precast concrete panel erection. In fact, Environmental Interiors has not had a single lost time accident on a metal ceiling installation in over 20 months.
- b. The Celline® system is installed using standard rolling scaffolding and mechanical lifts which are easily mobilized, relocated and stored at the end of each workday. The Celline® ceiling installation allows concurrent work of other trades within the same area (e.g. electrical, paint, etc.)
- c. The Celline® system is non-progressive from module to module, allowing for out of sequence construction of multiple bays in different areas.
- d. We currently estimate that we will install 1,600 square feet of completed Celline® system, per shift, per area.
- e. Celline® will require less lay-down area at the jobsite than the precast panels. Further, stockpiles of Celline® material will be palletized and can be easily relocated within the work area or redistributed to another work area via forklift.
- f. There is no welding required or recommended for the Celline® ceiling system.
- g. Celline® ceiling panels and suspension components can be field cut and modified to accommodate unforeseen or changed conditions.

III. Manufacturing

- a. Celline® components are formed of G235 Galvanized Steel and/or Type 316 Stainless Steel. Environmental Interiors, Inc. will provide U.S. mill certificates assuring quality conformance of the steel for the project. The Celline® system will not require an extensive ongoing inspection and testing program (as might be required to verify such properties as concrete psi, tensile strength, etc.) Also, since Celline® is a mechanically fastened system, there will be no welding inspections required.
- b. Environmental Interiors can manufacture custom sized Celline® panels and suspension components on short notice for immediate delivery to the jobsite to accommodate unforeseen or changed conditions.
- c. Because our materials are to be prefabricated to predetermined module dimensions, lead time to begin delivery of the Celline® system would be as follows:
 - Prepare final product submittal - 2 weeks
 - Formal approval of product submittal - 4 weeks

Mr. John Pastore
Modern Continental Construction Company
December 8, 1998
Page 3

- Lead time for coil steel (from product approval) - 12 weeks
- Prepare complete shop drawings - 10 weeks
- Approve shop drawings - 4 weeks
- Fabricate, paint and deliver initial shipment of Celline® to site (from receipt of steel) - 6 weeks

Thus, provided that all submittal are processed in a timely manner, we can begin delivery of materials to the jobsite within 20 weeks of your acceptance of our proposal.

IV. System Characteristics and Performance

- a. Celline® exceeds of the performance criteria specified for the project in Item 1.03B of Addendum #6.
- b. The Celline® system is coated with G235 hot dipped galvanizing and painted with a 4 mil charcoal grey epoxy finish, in compliance with the specifications for the plenum sidewalls and steel suspension components. The Celline® epoxy finish is applied through an electrostatic powder coating process that will provide the following properties in comparison to a liquid applied epoxy coating:
 - six times the corrosion resistance,
 - three times the humidity resistance,
 - two times the impact resistance,
 - four times the surface hardness.
- c. The Celline® epoxy powder coat can be provided in the specified color, or in a custom color of your choice.
- d. Celline® is so tough that it is used as the specified ceiling system for the inmate cell areas of the maximum-security housing units for the entire New York State Department of Corrections. There are currently over two million square feet of Celline® ceiling systems in service across the United States.
- e. The entire Celline® system (including optional full backer sheet) weighs less than 10 pounds per square foot.
- f. The hanger assemblies for the Celline® system on this project are composed of Type 316 stainless steel bolts, nuts, lock washers, hanger angles and associated components. The Type 316 suspension components will far outlast the galvanized plenum ceiling hanger assemblies currently called for in the contract documents. (See attached chart.)

Mr. John Pastore
Modern Continental Construction Company
December 8, 1998
Page 4

V. Maintenance

- a. Any required additional future parts for the system are readily available with a short lead-time, right from our factory in Hudson, New Hampshire. Emergency parts can be produced and delivered within 24 hours.
- b. Our proposal includes leaving an on hand maintenance stock of 400 square feet for delivery to you at the end of the project.
- c. CAT personnel can quickly make any necessary localized repairs to the Celline® system with the use of ordinary hand tools. Individual one foot panels can be removed and replaced by a two person crew working above the ceiling with a minimal disruption of tunnel operations.
- d. The powder epoxy paint finish of the Celline® panels can be easily and repeatedly power washed without affecting the appearance or longevity of the finish.
- e. All of the caulking and sealants within the Celline® system are concealed within the panels and suspension components to significantly extend their longevity and to eliminate any maintenance of exposed caulking and or sealants.

Given your initial favorable review of our proposed Celline® system for this project, we would like to sit down with members of the project team to discuss any proposed adjustments or revisions to our current shop drawings and specifications. Upon completion of this review, we would then like to construct a full scale mockup of this system for inspection by all involved parties. Please let us know how you wish us to proceed.

Thank you for your consideration of Environmental Interiors, Inc.



John C. Montgomery
President

CC: Mr. Bob Berry, Modern Continental Construction Company
Mr. Bill Lemoine, Modern Continental Construction Company

JCM/tr/CAT/corr/120898.jcm.doc